


ST & SC CONNECTOR

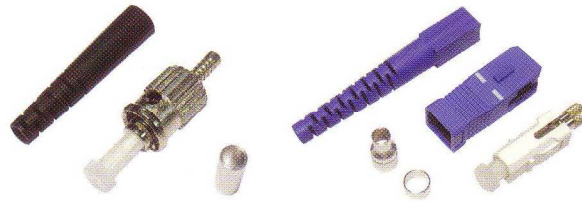

ST / SC CONNECTOR (MM / SM)

DESCRIPTION

- Epoxy/ Polish connector ST/SC
- Ferrule Assembly : Ceramic Ferrule
- Crimp Ring : Copper Alloy
- Spring : Stainless steel
- Dust cover : Polyolefin color clear
- Suitable for use with heat-cured or quick-cure epoxy
- Multimode connectors are suitable for use with 62.5/125 μ m and 50/125 μ m fiber optic cable
- Every connector kit can be terminated to 250 μ m fiber and 900 μ m tight buffered fiber

TECHNICAL SPECIFICATIONS

Description		Singlemode	Multimode
Insertion Loss (dB)	Max	0.5	0.5
	Min	0.2	0.2
Service Life (cycle)		1000	1000
Operating Temperature		-40°C to +75°C	
Storage Temperature		-55°C to +80°C	

Part No.	Description
FK-ST-SM	ST SM 3.0mm Connector
FK-ST-MM	ST MM 3.0mm Connector
FK-SC-MM	SC MM 3.0mm Connector
FK-SC-SM	SC SM 3.0mm Connector
FK-FC-MM	FC MM 3.0mm Connector