


STANDARD WALL MOUNT UNIT OF 19" RACK

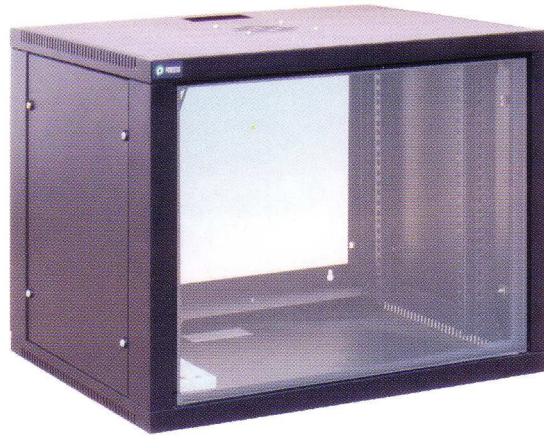



DESCRIPTION

Conforming to International Standards, the enclosures are used in environment where the protection of precision and sensitive equipment are of utmost importance, as in the:

- Telecommunication and Networking Industry
- Commercial and Industrial Installations
- Test and Measurement Systems
- Audio-Visual Installations
- Custom-made enclosures for special installations

The wall mount rack enclosure is designed primarily for Networking application. The 19" mounting vertical are fully adjustable front to back, sliding along depth members. The side panels can be removed to allow access for cable at the rear. Finished in Black epoxy powder paint as standard. Available from 6U through 15U.

DIMENSION FOR 19" WALL MOUNT

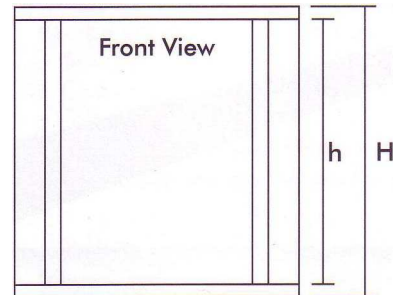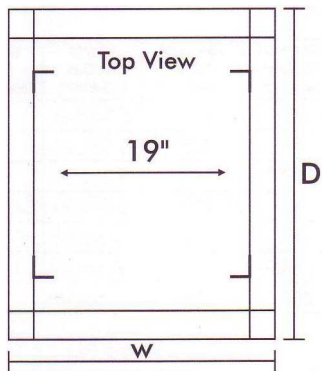


Size	Over All Depth (mm) "D"	Over All Width (mm) "W"	Over All Height (mm) "H"	Internal Height (mm) "h"	Power Outlet (13AMP)	Weight (kg) 500mm D
6Ux19"	500	600	337	267	3 Socket	17
9Ux19"	500	600	470	400	3 Socket	20
12Ux19"	500	600	603	533	3 Socket	23
15Ux19"	500	600	737	667	3 Socket	26

Standard unit of 19" Wall Mount Rack comprises of the following items:


- Rack framework
- 1 vented top & bottom cover
- 1 front door with lock
- 2 detachable side panels with screw
- 4 adjustable panel mounting members
- 1 row power point
- Cable with plug top
- 20 sets M6 caged nuts
- Epoxy high quality powder coated finishing (Black color)

Panel Mounting Member




Allows all standard 19" equipment to be mounted on it

Front Glass Door




Unity Symmetry allows left or right hand door swing operation

Side Panel

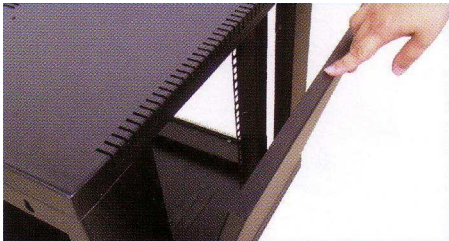


Screwable Side Panel

Rear Opening

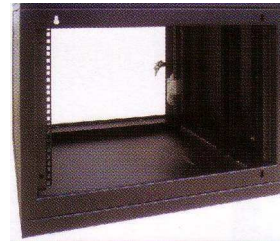

Integrated Cable Access Hole

Top Cover

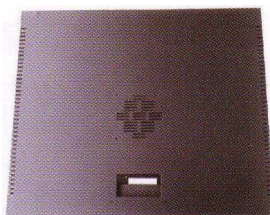

Ventilation Fan Hole and Cable Entry