




# STANDARD FLOOR STANDING UNIT OF 19" RACK

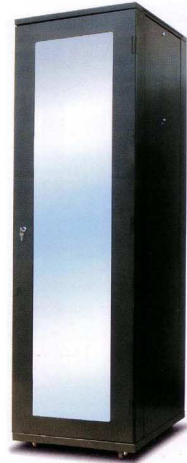

## DESCRIPTION

The free Standing 19" Rack combines lightness and rigidity, with clean line design to harmonize into any office or industrial environment. The racks conform to IEC 297 specification and are finished in black color epoxy powder paint. It had good load-carrying capacity with flexibility of the 19" panel mounting adjustable front to back along the depth members. Available from 15U through 42U.

## DIMENSION FOR 19" FLOOR STANDING

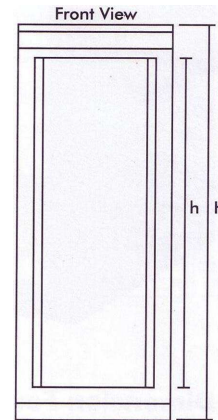


Size	Over All Depth (mm) "D"	Over All Width (mm) "W"	Over All Height (mm) "H"	Internal Height (mm) "h"	Power Outlet (13AMP)	Weight (kg) 800mm D
15Ux19"	800	580	837	667	5 Socket	70
18Ux19"	800	580	970	800	5 Socket	80
24Ux19"	800	580	1237	1067	5 Socket	98
28Ux19"	800	580	1415	1245	5 Socket	109
33Ux19"	800	580	1637	1467	10 Socket	123
37Ux19"	800	580	1815	1645	10 Socket	130
42Ux19"	800	580	2037	1867	10 Socket	148

## Standard unit of 19" Floor Standing Rack comprises of the following items:


- Rack framework
- 1 vented top cover
- Front door with lock
- Rear door with lock
- 2 detachable side panels with lock
- 4 adjustable panel mounting members
- 1 row power point
- Cable with plug top
- 1 set castor wheel
- 40 sets of M6 caged nuts
- 1 set adjustable feet
- Cable Tray
- Epoxy high quality powder coated finishing (Black color)

### Panel Mounting Member




Allows all standard 19" equipment to be mounted on it

### 19" Power Outlet

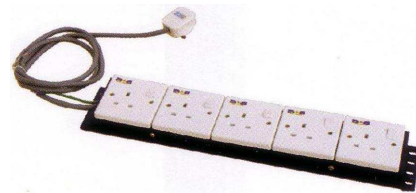


13 Amps power outlet allows to mount on the 19" panel mounting

### Cable Tray

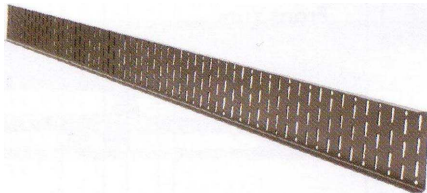


Useful for cable management, measuring 100mm wide, and available in meter lengths

### Adjustable Feet / Castor Wheel

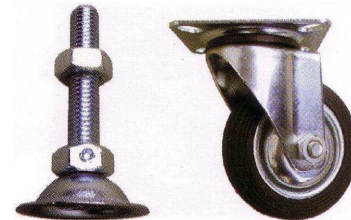


Adjustable feet are for leveling the rack after it has been placed in position. Castor wheel available in set of 4.

### Rear Door Latch

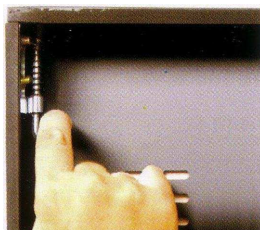

Quick release rear door

### Front Door opening up to 180°

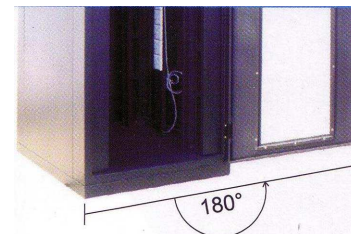

Optimized width of door opening